
ASME B16.47 SERIES A · ASME B16.47-2025

B16.47 A Class 150 42″ Blind

DN1050 · Blind · Dimensions mm · Weight kg

ASME B16.47 Series A · 42″ (DN1050) · Class 150 · Blind Flange

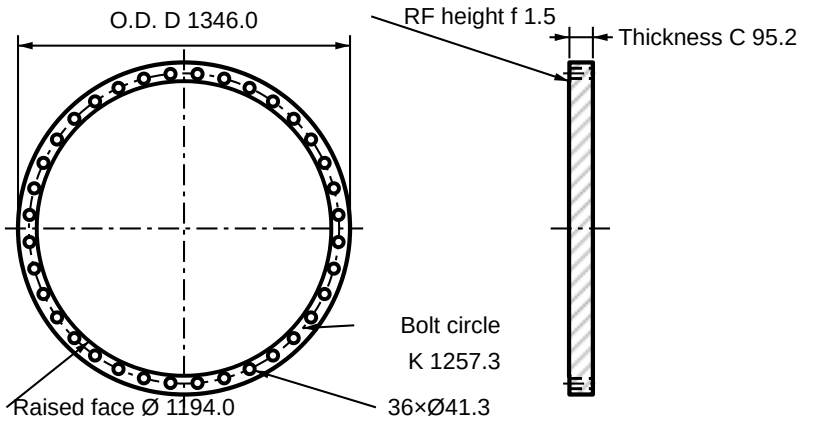

Both views share one scale (1:21); schematic only

Unit: mm

Symbol	Item	Value
D	Outside diameter	1346 mm
C	Flange thickness / blind thickness	95.2 mm
D2	Raised face diameter	1194 mm
f	Raised face height	1.5 mm
K	Bolt circle diameter	1257.3 mm
n	Number of bolt holes	36 pcs
d	Bolt hole diameter	41.3 mm
—	Approximate weight	1080 kg

PRESSURE–TEMPERATURE RATINGS · CLASS 150 · GROUP 1.1

≤ 38 °C **19.6 bar**	50 °C **19.1 bar**	100 °C **17.7 bar**	150 °C **15.8 bar**
200 °C **13.8 bar**	250 °C **12.1 bar**	300 °C **10.2 bar**	325 °C **9.3 bar**
350 °C **8.4 bar**	375 °C **7.4 bar**	400 °C **6.5 bar**	425 °C **5.5 bar**
450 °C **4.6 bar**	475 °C **3.7 bar**	500 °C **2.8 bar**	538 °C **1.4 bar**

Source: Table 3 (p. 14) — pressure–temperature ratings for Group 1.1 materials, SI units; Group 1.1.

MATERIAL AND NOTES

Base material: ASTM A105 (North America, Middle East)

Rating: Series A follows the former MSS SP-44 dimensions. Ratings are ASME classes 150, 300, 400, 600 and 900, with allowable pressures read from the B16.47 pressure–temperature tables for the material group and design temperature.

Tolerances / marking: Tolerances, material and marking: ASME B16.47-2025. Series A and Series B are not interchangeable.

NOTES / SPECIAL REQUIREMENTS

Work order _____ Inspector _____ Date _____ Travels with the part; file after inspection

Source: ASME B16.47-2025, Series A; dimensions transcribed from ASME B16.47-2025, verified 2026-11-04. Sheet #9.

This sheet is a factual compilation of published standards tables and is not a substitute for the standard itself. Verify dimensions and ratings against the edition named in your purchase specification before quoting, manufacturing or inspecting a critical part.

Scan to open